

**Electrical Specification**

Input Rated Voltage :	100 - 277Vac
Input Frequency :	50/60 Hz
Efficiency :	87%
Power Factor :	0.9
Output Voltage :	34.2 - 37.8 VDC
Output Current :	4.17 ADC
Output Power :	150W max.
Protection :	SCP, OCP, OVP



**Environmental Characteristics**

Working Temperature (ta) :	-40 ~ +60 °C
IP Rating :	IP67, For Dry and/or Damp location

**Safety**

Product Design :	Class I,
Regular Standard :	UL8750 Non-Class 2, IEC 61347-1, IEC 61347-2-13
Approval Safety :	UL, cUL (cULUS), CE


**EMC**

Emission :	Compliance to EN 55015 / FCC Part 15 Class B ; EN 61000-3-2 Class C ; EN 61000-3-3
Immunity :	Compliance to EN 61547, IEC 61000-4-2,3,4,5,6,8,11

**Mechanical**

Dimension (L x W x H) :	240 x 69 x 38.5 (mm)
Input wires :	L: Black, N: White, FG: Green/Yellow, length: 200mm
Output wires :	Positive: Red, Negative: Black; length: 200mm

**Physical Parameters**

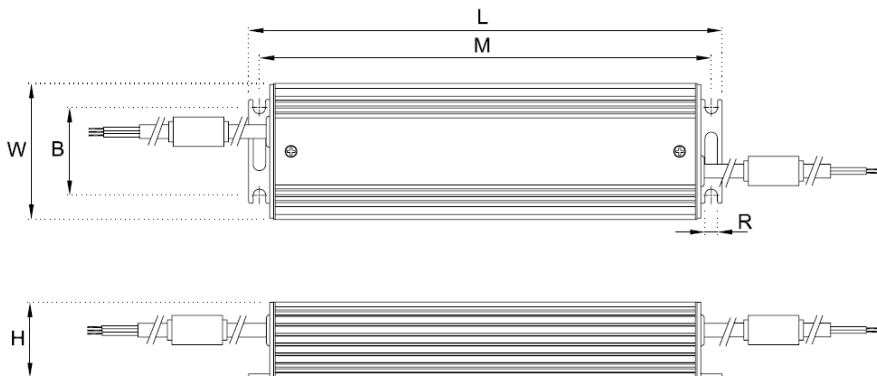

L: 240 mm	W: 69 mm
H: 38.5 mm	R: 6.3 mm
M: 229 mm	B: 44.6 mm

