

REPORT

7H Series



finder[®]
SWITCH TO THE FUTURE

New fan assisted panel heaters with PTC system



7H Series

Prevents the formation of condensation and ensures the optimum temperature within electrical enclosures.



Features

- Heater power: 25 - 50 - 100 - 150 - 250 and 400 W
- Power supply: 230 V AC or 110...230 V AC/DC
- PTC self-regulating heating system
- Fan assisted heaters
- Aluminium profile encased in a plastic housing
- Vertical positioning
- 35 mm rail (EN 60715) mounting with clip

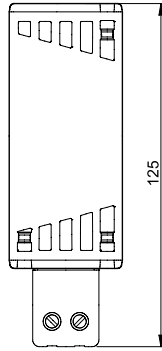

Type 7H.51.0.230.0025
Heating power 25 W

Type 7H.51.0.230.0050
Heating power 50 W

- Power supply voltage 110...230 V AC/DC
- PTC self-regulating heating system
- Aluminium profile encased in a plastic housing
- Operating temperature range: -45...+50°C
- Screw terminals








Type 7H.51.0.230.0100
Heating power 100 W



Type 7H.51.0.230.0150
Heating power 150 W

- Power supply voltage 110...230 V AC/DC
- PTC self-regulating heating system
- Aluminium profile encased in a plastic housing
- Operating temperature range: -45...+50°C
- Screw terminals

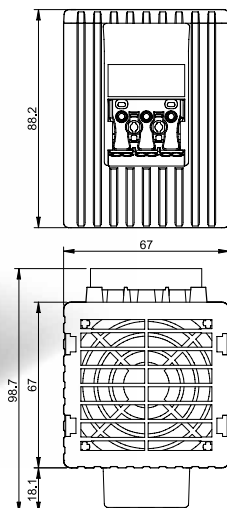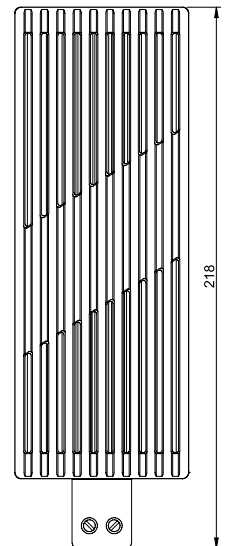

Type 7H.51.8.230.0250
Heating power 250 W

Type 7H.51.8.230.0400
Heating power 400 W

- Power supply voltage 230 V AC
- Fan assisted heaters
- PTC self-regulating heating system
- Aluminium profile encased in a plastic housing
- Air flow rate 30m³/h
- Operating temperature range: -40...+50°C
- Fast wiring terminals

FINDER reserves the right to alter characteristics at any time without notice. FINDER assumes no liability for damage to persons or property, caused as a result of the incorrect use or application of its products.

AD7HEN - October 2019 - Report 7H Series - On-line updates