

Sensor-switched LED floodlight

XLED slim S

Anthracite

EAN 4007841 012052

Article number 012052



LED

30 years (Ø 4,5h / day)

3000 K

3000K warm-white



infrared sensor 160°



max. 8 m



IP44



2 - 1000 lux



2 sec - 70 min



ideal 2 m



energy saving

3 years

manufacturer's warranty
steinel.de/garantie3y

Function description

Light meets elegance. Elegantly designed sensor LED floodlight XLED slim S with 7,2 W, ideal for building entrances and pathways, pleasant and effective light (648 lm) requiring very little energy, sensor reach of up to 8 m.

Technical specifications

Dimensions (L x W x H)	201 x 66 x 241 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Output	7,2 W
Interconnection	No
Luminous flux	648 lm
Gesamtprodukt Effizienz	90 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Active and Passive Thermo Control
With motion detector	Yes
Detection angle	160 °
Electronic scalability	No

Mechanical scalability	No
Reach, radial	r = 4 m (22 m ²)
Reach, tangential	r = 8 m (89 m ²)
Photo-cell controller	Yes
Time setting	2 s – 70 Min.
Main light adjustable	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Installation site	wall
Cover material	sticker
Version	Anthracite
PU1, EAN	4007841012052

<https://www.steinell.de>

Subject to technical modifications

01.2022

Page 1 from 2

Sensor-switched LED floodlight

XLED slim S


Anthracite

EAN 4007841 012052

Article number 012052



Detection Zone

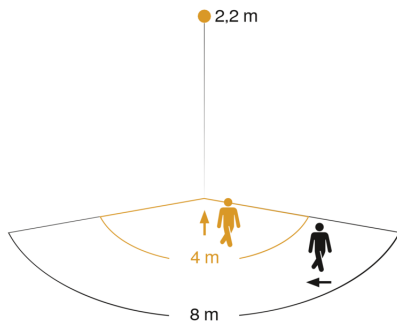

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

