


# PianaLed

**Exit sign luminaire** designed as shallow frame display. Integrated LED and light guide panel provides optimised light levels. Single and double face universal. Quick connection and easy mounting and installation. Replaceable pictogram design.

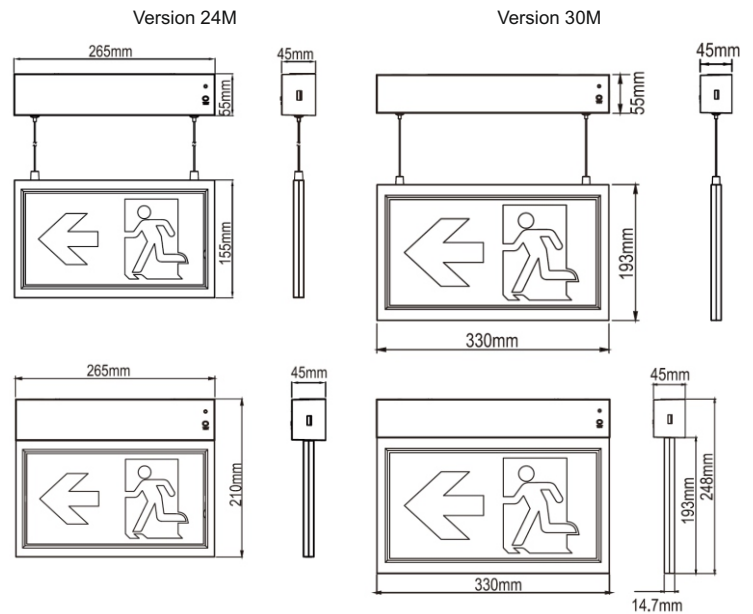

## Technical Data

### Mounting:

Wall, ceiling

### Body:

ABS housing

### Mains supply:

198 V - 254 V / 50Hz

### Ambient temperature:

0 to +40 °C

### Specification:

Maintained or non maintained mode

Order code	Lamp	Duration	Battery type	Battery voltage	Battery capacity	Flux lm	Manual test	Auto test
Version 24M								
N94100	LED	1h	NiCd	3,6V	600mA	32	x	
N94100AT	LED	1h	NiCd	3,6V	600mA	32		x
N94101	LED	3h	NiCd	3,6V	900mA	32	x	
N94101AT	LED	3h	NiCd	3,6V	900mA	32		x
Version 24M wiring suspension								
N94102	LED	1h	NiCd	3,6V	600mA	32	x	
N94102AT	LED	1h	NiCd	3,6V	600mA	32		x
N94103	LED	3h	NiCd	3,6V	900mA	32	x	
N94103AT	LED	3h	NiCd	3,6V	900mA	32		x
Version 30M								
N94110	LED	1h	NiCd	3,6V	600mA	32	x	
N94110AT	LED	1h	NiCd	3,6V	600mA	32		x
N94111	LED	3h	NiCd	3,6V	900mA	32	x	
N94111AT	LED	3h	NiCd	3,6V	900mA	32		x
Version 30M wiring suspension								
N94112	LED	1h	NiCd	3,6V	600mA	32	x	
N94112AT	LED	1h	NiCd	3,6V	600mA	32		x
N94113	LED	3h	NiCd	3,6V	900mA	32	x	
N94113AT	LED	3h	NiCd	3,6V	900mA	32		x