

Filter Fan (24...630)m³/h and Exhaust Filter



Drying kilns



Textile machines



Machines for paper processing



Machines for ceramics



Woodprocessing machines



Panels for electrical distribution



Control panels



Forced-air ventilators



SERIES



Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available





- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 24/29 m³/h
- Size 1





- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 55/63 m³/h
- Size 2

- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 100/115 m³/h

7F.20.8.xxx.3100

• Size 3

finder

or	outline	drawing	see	page	14

For outline drawing see page 14							
Fan data							
Air volume (free flow): 50/60 Hz	m³/h	24	/29	55.	/63	100/	/115
Air volume (with exhaust filter in							
50/60 Hz	m³/h	14/	16.5	40/-	45.5	75/8	85.5
Noise level	dB (A)	2	27	4	2	4	2
Life time at 40 °C	h	50	000	500	000	500	000
Electrical data							
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230	120	230
Operating range	AC	(01.1)U _N		(0.81.1)U _N		(0.81.1)U _N	
Current consumption: 50/60 Hz	A	0.23/0.18	0.1/0.08	0.25/0.21	0.13/0.11	0.25/0.21	0.13/0.11
Rated power: 50/60 Hz	w	27/21	23/18	30/25	29/25	30/25	29/25
Other data							
Housing, cover				Plastics accord	ing to UL94 V-0		
Filter mat (included)			G3 acco	rding to EN 779, f	iltering degree (8	090)%	
Filter material		Synth	netic fibre with pr	ogressive constru	ıction, temperatu	re resistant to +1	00 °C,
			se	lf extinguishing, (Class F1 (DIN 5343	38)	
Electrical connections				Push-in 1	terminals		
Wire size (mm²)	min/max	0.7/2.5					
Wire size (AWG)	min/max			18	/14		

-15...+55

IP 54 Type 12

IV-2021, www.findernet.com

Ambient temperature range

Approvals (according to type)

Protection category according to EN 60529

Protection category according to NEMA

Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available



7F.20.8.xxx.4250



- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz. 250/295 m³/h
- Size 4



7F.20.8.xxx.4400



- Nominal voltage 120 or 230 V AC
- Air volume 50/60 Hz: 400/445 m³/h
- Size 4

Fan data							
Air volume (free flow): 50/60 Hz	m³/h	250,	/295	400/	445		
Air volume (with exhaust filter installed):							
50/60 Hz	m³/h	195,	/228	270/	/300		
Noise level	dB (A)	5	6	7	2		
Life time at 40 °C	h	500	000	500	000		
Electrical data							
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230		
Operating range	AC	(0.8	1.1)U _N	(0.8	1.1)U _N		
Current consumption: 50/60 Hz	Α	0.35/0.40	0.2/0.22	0.6/1	0.3/0.49		
Rated power: 50/60 Hz	W	42/48	46/50	72/120	69/112		
Other data							
Housing, cover		Plastics according to UL94 V-0					
Filter mat (included)		G3 accor	rding to EN 779, f	iltering degree (80	090)%		
Filter material		Synthetic fibre with progressive construction, temperature					
		resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)					
Electrical connections		Push-in terminals					
Wire size (mm²)	min/max		0.7	/2.5			
Wire size (AWG)	min/max		18.	/14			
Ambient temperature range	Ambient temperature range °C			−15+55			
Protection category according to	IP 54						
Protection category according to	Type 12						
Approvals (according to type)	C€ [R] 3)°s						

$lacktrel{f \$}$ finder

Filter Fan for electrical cabinets and enclosures 120 V or 230 V AC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 120 or 230 V AC (50/60 Hz)
- Time-saving installation and maintenance
- Further available versions*:
- EMC Filter Fan (7F.70) and EMC Exhaust Filter (7F.07)
- Filter Fan supplied in Reverse flow mode (7F.80)
- * Product codes, see pages 8 & 11

7F.50.8.xxx.5500



- Nominal voltage 120 or 230 V AC
- Air volume 500 m³/h
- Rated power 70 W
- Size 5

7F.50.8.xxx.5630



- Nominal voltage 120 or 230 V AC
- Air volume 630 m³/h
- Rated power 130 W
- Size 5

Note:

By reversing the fan motor, the air direction can be changed from "Inlet" Filter Fan mode to "Exhaust" Filter Fan mode** (except for the types 7F.50.8.xxx.4370, 7F.50.8.xxx.5500 and 7F.50.8.xxx.5630).

** Supplied in "Inlet" Filter Fan mode (Standard).

Fan data						
Air volume (free flow) m ³ /h		500		630		
Air volume (with exhaust filter in	nstalled) m³/h	3	70	47	70	
Noise level	dB (A)	6	55	7	2	
Life time at 40 °C	h	50	000	500	000	
Electrical data						
Nominal voltage (U _N)	V AC (50/60 Hz)	120	230	120	230	
Operating range	AC	(0.8	.1.1)U _N (0.81.1)U _N		1.1)U _N	
Current consumption	Α	0.8	0.4	1.10	0.55	
Rated power	W	70	70	130	130	
Other data						
Housing, cover		Plastics according to UL94 V-0, light grey (RAL 7035)				
Filter mat (included)		G3 acco	rding to EN 779, f	iltering degree (8	090)%	
Filter material		,	ore with progressi		.	
Electrical connections/wire size		resistant to +100 °C, self extinguishing, Class F1 (DIN 53438) screw terminals / max. 2.5 mm ²				
Screw torque Nm		0.8				
Ambient temperature range	°C	-10+70				
Protection category according to	IP 54					
Approvals (according to type)	C€ [IR] ∂N°us					

finder


Filter Fan for electrical cabinets and enclosures 24 V DC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 24 V DC
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available



7F.20.9.024.1020

- Nominal voltage 24 V DC
- Air volume 24 m³/h
- Rated power 3.6 W
- Size 1





- Nominal voltage 24 V DC
- Air volume 55 m³/h
- Rated power 7 W
- Size 2



7F.20.9.024.3100

- Nominal voltage 24 V DC
- Air volume 100 m³/h
- Rated power 7 W
- Size 3

For outline o	drawing	see	page	14	
---------------	---------	-----	------	----	--

Approvals (according to type)					
Protection category according to NEMA	١	Type 12			
Protection category according to EN 60	529	IP 54			
Ambient temperature range	°C	-15+55			
Wire size (AWG)	min/max		18/14		
Wire size (mm²)	min/max		0.7/2.5		
Electrical connections			Push-in terminals		
Filter material		Synthetic fibre with progressive	e construction, temperature resista Class F1 (DIN 53438)	nnt to 100 °C, self extinguishing,	
Filter mat (included)		G3 accor	rding to EN 779, filtering degree (8	090)%	
Housing, cover			Plastics according to UL94 V-0		
Other data					
Rated power	W	3.6	7	7	
Current consumption	Α	0.15	0.32	0.32	
Operating range	DC	(0.81.1)U _N	(0.81.1)U _N	(0.81.1)U _N	
Nominal voltage (U _N)	V DC	24	24	24	
Electrical data					
Life time at 40 °C	h	50000	50000	50000	
Noise level	dB (A)	37.5	46	45	
Air volume (with exhaust filter installed)) m³/h	14	40	75	
Air volume (free flow)	m³/h	24	55	100	
Fan data					

finder

Filter Fan for electrical cabinets and enclosures 24 V DC versions

- Very low acoustic noise
- Minimal depth within enclosure
- Nominal voltage: 24 V DC
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Filter Fan supplied in Reverse flow mode (7F.21)
- Black colour RAL 9004 Available




- Nominal voltage 24 V DC
- Air volume 250 m³/h
- Rated power 43 W
- Size 4

To outline drawing see page 13		
Fan data		
Air volume (free flow)	m³/h	250
Air volume (with exhaust filter installed	m³/h	195
Noise level	dB (A)	64
Life time at 40 $^{\circ}\text{C}$	h	50000
Electrical data		
Nominal voltage (U _N)	V DC	24
Operating range	DC	(0.81.1)U _N
Current consumption	Α	1.8
Rated power	W	43
Other data		
Housing, cover		Plastics according to UL94 V-0
Filter mat (included)		G3 according to EN 779, filtering degree (8090)%
Filter material		Synthetic fibre with progressive construction, temperature resistant to 100 °C, self extinguishing, Class F1 (DIN 53438)
Electrical connections		Push-in terminals
Wire size (mm²)	min/max	0.7/2.5
Wire size (AWG)	min/max	18/14
Ambient temperature range	°C	−15+55
Protection category according to EN 60529		IP 54
Protection category according to NEMA		Type 12
Approvals (according to type)		C€ [H[¿ ₹\]°us



Ordering information

 $Example: Series\ 7F, Filter\ Fan\ for\ mounting\ in\ sidewalls, nominal\ voltage\ 230\ V\ AC, size\ 1, air\ volume\ 24\ m^3/h.$

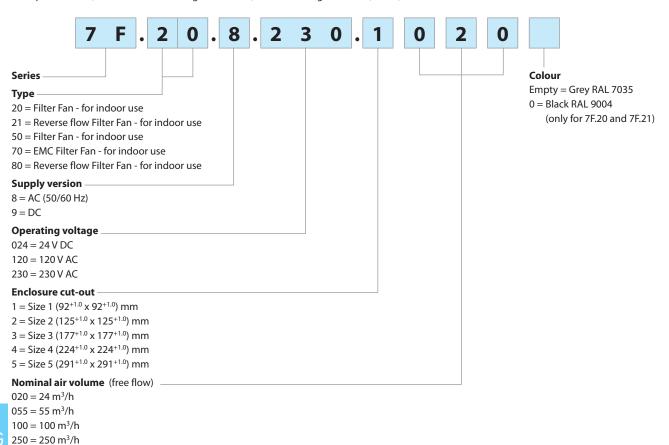

Filter Fans - All versions

 $400 = 400 \text{ m}^3/\text{h}$ $500 = 500 \text{ m}^3/\text{h}$ $630 = 630 \text{ m}^3/\text{h}$

Standard versions	EMC versions	Reverse flow versions	
7F.20.8.120.1020	_	7F.21.8.120.1020	Filter Fan, Size 1
7F.20.8.120.2055	_	7F.21.8.120.2055	Filter Fan, Size 2
7F.20.8.120.3100	_	7F.21.8.120.3100	Filter Fan, Size 3
7F.20.8.120.4250	_	7F.21.8.120.4250	Filter Fan, Size 4
7F.20.8.120.4400	_	7F.21.8.120.4400	Filter Fan, Size 4
7F.50.8.120.5500	_	7F.80.8.120.5500	Filter Fan, Size 5
7F.50.8.120.5630	_	_	Filter Fan, Size 5
7F.20.8.230.1020	_	7F.21.8.230.1020	Filter Fan, Size 1
7F.20.8.230.2055	_	7F.21.8.230.2055	Filter Fan, Size 2
7F.20.8.230.3100	_	7F.21.8.230.3100	Filter Fan, Size 3
7F.20.8.230.4250	_	7F.21.8.230.4250	Filter Fan, Size 4
7F.20.8.230.4400	_	7F.21.8.230.4400	Filter Fan, Size 4
7F.50.8.230.5500	7F.70.8.230.5500	7F.80.8.230.5500	Filter Fan, Size 5
7F.50.8.230.5630	7F.70.8.230.5630	_	Filter Fan, Size 5
7F.20.9.024.1020	_	7F.21.9.024.1020	Filter Fan, Size 1
7F.20.9.024.2055	_	7F.21.9.024.2055	Filter Fan, Size 2
7F.20.9.024.3100	_	7F.21.9.024.3100	Filter Fan, Size 3
7F.20.9.024.4250	_	7F.21.9.024.4250	Filter Fan, Size 4

Note:

The technical features (air volume, dimensions and electrical parameters) for the Standard Filter Fans (7F.20 and 7F.50), the EMC Filter Fans (7F.70) and the Reverse flow versions (7F.21 and 7F.80) - are exactly the same.

7F.50.8.120.5630 has no UL approval. Other versions on request.

Exhaust Filter

The size of the Exhaust Filter should match the size of the Filter Fan to achieve the best ventilation within the cabinet

- Minimum depth within enclosure
- Time-saving installation and maintenance
- Easily replaceable filter mat
- Black colour RAL 9004 Available



7F.02.0.000.1000




- For Filter Fans 7F.20.x.xxx.1020
- Size 1





- For Filter Fans 7F.20.x.xxx.2055
- Size 2





- For Filter Fans 7F.20.x.xxx.3100
- Size 3


· · · · · · · · · · · · · · · · · · ·				
Other data				
Housing, cover	Plastics according to UL94 V-0			
Filter mat (included)	G3 according to EN 779, filtering degree (8090)%			
Filter material	Synthetic fibre with progressive construction, temperature resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)			
Protection category according to EN 60529	IP 54			
Protection category according to NEMA	Type 12			
Approvals (according to type)	C€ [H[c ¾ \"s			



Exhaust Filter

The size of the Exhaust Filter should match the size of the Filter Fan to achieve the best ventilation within the cabinet

- Minimum depth within enclosure
- Time-saving installation and maintenance
- EMC Exhaust Filters (7F.07 only for 7F.05)
- Easily replaceable filter mat (7F.02)
- Black colour RAL 9004 Available (only for 7F.02)





- For Filter Fans 7F.20.x.xxx.4250 or 7F.20.8.xxx.4400
- Size 4

7F.05.0.000.5000




- For Filter Fans 7F.50.8.xxx.5500 or 7F.50.8.xxx.5630
- Size 5

3 , 3	
Other data	
Housing, cover	Plastics according to UL94 V-0, light grey (RAL 7035)
Filter mat (included)	G3 according to EN 779, filtering degree (8090)%
Filter material	Synthetic fibre with progressive construction, temperature resistant to +100 °C, self extinguishing, Class F1 (DIN 53438)
Protection category according to EN 60529	IP 54
Protection category according to NEMA	Type 12
Approvals (according to type)	C€ [A[c 3/1 °us



Ordering information

Example: Series 7F, Exhaust Filter for mounting in sidewalls, size 1.

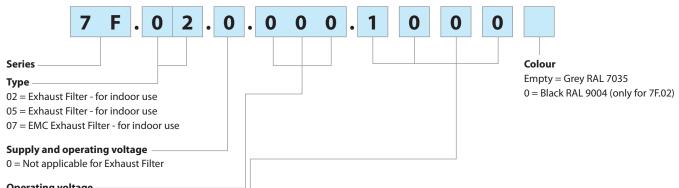

Operating voltage

000 = Not applicable for Exhaust Filter

Enclosure cut-out

 $1000 = \text{Size } 1 (92^{+1.0} \times 92^{+1.0}) \text{ mm}$

 $2000 = \text{Size 2} (125^{+1.0} \times 125^{+1.0}) \text{ mm}$

 $3000 = \text{Size } 3 (177^{+1.0} \times 177^{+1.0}) \text{ mm}$

 $4000 = \text{Size 4} (224^{+1.0} \times 224^{+1.0}) \text{ mm}$

 $5000 = \text{Size } 5 (291^{+1.0} \text{ x } 291^{+1.0}) \text{ mm}$

Exhaust Filter - All versions				
Standard-versions	EMC - versions			
7F.02.0.000.1000	_	Exhaust Filter, Size 1		
7F.02.0.000.2000	_	Exhaust Filter, Size 2		
7F.02.0.000.3000	_	Exhaust Filter, Size 3		
7F.02.0.000.4000	_	Exhaust Filter, Size 4		
7F.05.0.000.5000	7F.07.0.000.5000	Exhaust Filter, Size 5		

Components

Standard-Filter Fan	Standard-Exhaust Filter	EMC-Filter Fan	EMC-Exhaust Filter	Filter mat	Size
7F.20.8.xxx.1020	7F.02.0.000.1000	_	_	07F.15	1
7F.20.8.xxx.2055	7F.02.0.000.2000	_	_	07F.25	2
7F.20.8.xxx.3100	7F.02.0.000.3000	_	_	07F.35	3
7F.20.8.xxx.4250	7F.02.0.000.4000	_	_	07F.45	4
7F.20.8.xxx.4400	7F.02.0.000.4000	_	_	07F.45	4
7F.50.8.xxx.5500	7F.05.0.000.5000	7F.70.8.230.5500	7F.07.0.000.5000	07F.55	5
7F.50.8.xxx.5630	7F.05.0.000.5000	7F.70.8.230.5630	7F.07.0.000.5000	07F.55	5
7F.20.9.024.1020	7F.02.0.000.1000	_	_	07F.15	1
7F.20.9.024.2055	7F.02.0.000.2000	_	_	07F.25	2
7F.20.9.024.3100	7F.02.0.000.3000	_	_	07F.35	3
7F.20.9.024.4250	7F.02.0.000.4000	_	_	07F.45	4

Spare Filter mats	07F.15	07F.25	07F.35	07F.45	07F.55
Protection category			IP54		


Accessories





07F.80

Pressure compensation device, for pressure compensation in closed cabinets or enclosures		07F.80		
Air interface area	cm ²	7		
Mounting		PG 29 thread with union nut		
Torque	Nm	5 (max. 10)		
Material		plastic according to UL94-V0		
Dimensions (diameter/depth)	mm	65.5/30.5		
Mounting position		upper part of cabinet sidewalls		
Ambient temperature	°C	-45+70		
Protection category		IP 55		





Unit package contains 2 pressure compensation devices



Mounting instructions for Filter Fans

Mounting arrangement of Filter Fans and Exhaust Filter

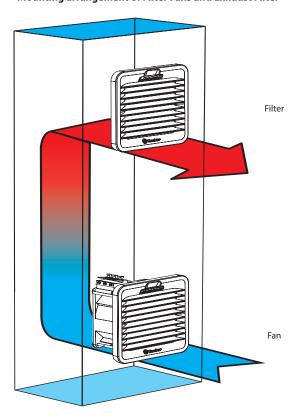



The installation with the only clips is optimized for 1.5 mm thick sheets; it is also possible with thicknesses from 1 to 2.5 mm.


Fixing with screws (supplied) is recommended.

Tightening torque 0.3 Nm.

Replacement of Filter mat (Type 7F.20)














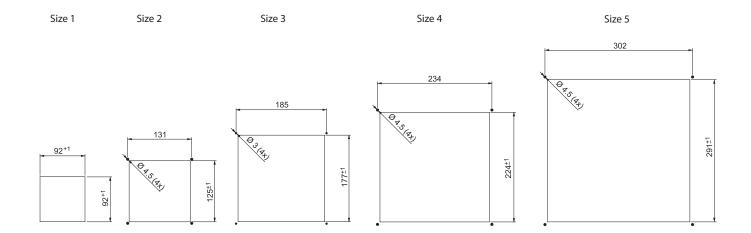

Mounting and maintenance

- 1. Make the panel cut-out according to the size of the Filter Fan or Exhaust Filter in the sidewall of the cabinet as appropriate.


 A template of the panel cut-out is included in the packaging of the Filter Fan or Exhaust Filter.
- 2. Make the electrical connection.
- 3. Mount by simply snapping the side-located lugs on the Filter Fan or Exhaust Filter into the panel cut-out (without using screws for sidewall thickness of 1.2...2.4 mm).
 - At other thickness it is recommended to mount the Filter Fan by the screws supplied (for size 1, the template shows the mounting cut-out only).
- 4. When screws are needed for the mounting, remove the plastic cover and fix the Filter Fan with the 4 screws supplied. Then insert the filter mat and snap the plastic cover to the mounting frame.
- 5. During maintenance or when replacing the filter mat remove the plastic cover, replace the filter mat and snap on the plastic cover.





Outline drawings

Type 7F.20.x.xxx.1020




\$ 54.4 9


AC version

DC version


Type 7F.02.0.000.1000




Type 7F.20.x.xxx.2055




Type 7F.02.0.000.2000




Type 7F.20.x.xxx.3100



Type 7F.02.0.000.3000




Type 7F.20.x.xxx.4250



Type 7F.02.0.000.4000


255




IV-2021, www.findernet.com

Outline drawings

Type 7F.20.x.xxx.4400

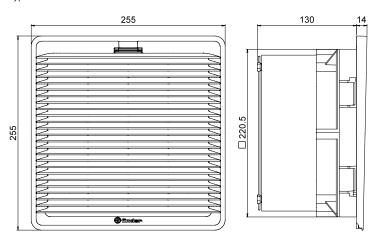


Type 7F.02.0.000.4000




finder


Type 7F.50.x.xxx.5500




Type 7F.05.0.000.5000



Type 7F.50.x.xxx.5630




Type 7F.05.0.000.5000





Fan selection

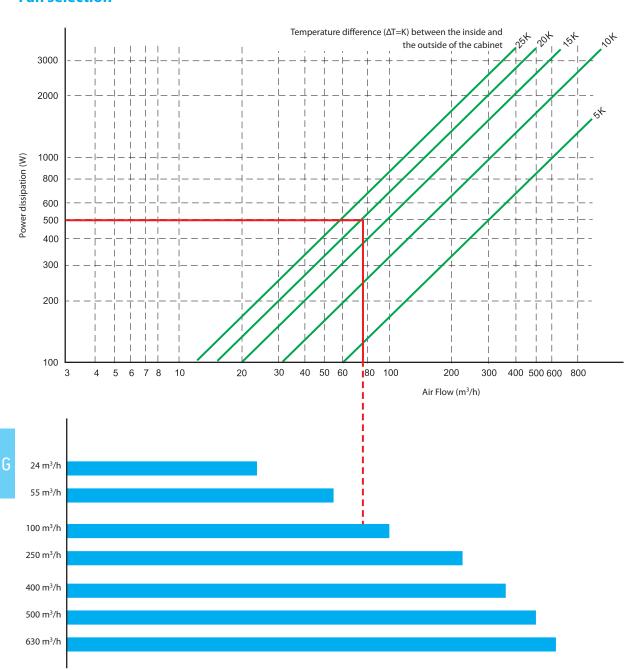

Example

First, estimate the power dissipated within the cabinet. Then calculate the maximum difference between the internal and external temperature (green lines) by considering the difference between the maximum permitted internal temperature (as dictated by the temperature rating of the enclosed components, or specification) and the maximum temperature expected outside the cabinet.

The projection onto the X axis, of the intersection between the power (watts) and the appropriate green line, corresponds to the air flow rate in m^3/h required to meet the maximum internal temperature limit. Extending this line vertically to intersect with the blue horizontal lines, indicates the most appropriate model of 7F fan to be fitted to the cabinet to provide the requisite air flow.

The example above considers a cabinet with an internal thermal power dissipation of 500 W, and assumes the maximum temperature difference between the inside and the outside of the cabinet to be 20K. The required air flow can be seen to be a little less than 80 m³/h.

It is suggested that this is increased by 10% to allow for the affects of a dirty filter.

And so, it can be seen that models of the 7F with 100 m³/h flow rate will provide the proper dissipation of heat under these circumstances.





Application notes

Filter Fan

The ball-bearing axial fan housing is made of aluminium and the rotor is made of plastic or metal (depending on the type).

Within EN 779 are specified 9 filter classes, categorised into 4 coarse dust filters und 5 fine dust filters.

The coarse dust filters G1 - G4 are able to filter particles $> 10 \ \mu m$ and the fine dust filters G5 - G9 are able to filter particles from $(1...10)\mu m$.

	Filter classes	Example of particle	Particle size
	G1 - G4 (EU1 - EU4)	Textile fibers, hair, sand, pollen, spores, insects, cement dust	> 10 µm
	G5 - G9 (EU5 - EU9)	Pollen, spores, cement dust, tobacco smoke, oil smoke, soot	(110)μm

Filtering degree (Am)

The degree of filtering (Am) is the percentages of dust, by weight, that is caught and retained by the filter.

Filter mats

The quality of these filters mats has been independently tested, according EN 779 and branded after passing the test.

The filter mats are to filter class G3 and have an average filtering degree of (80...90)%.

Filter material

The filter material consists of a synthetic fiber with progressive construction which is moisture-resistant to 100% RH and temperature resistant to

According to the strict requirements of fire class F1, DIN 53438, these filter mats are self extinguishing.

Progressive construction at filter mats

The individual fibers of these filter mats are bonded by a special process to provide a progressive construction where the fiber size and spacing varies through the thickness of the filter mat.

This means that coarse dust particles are caught early and fine dust later through the thickness of the mat. In this way the entire depth of the filter

Flammability class of the housing and the cover

The plastic materials used comply with flammability class V-0, according UL94.

EMC Filter Fans and EMC Exhaust Filters

The plastic mounting frame of the EMC Filter Fans (7F.70) and EMC Exhaust Filters (7F.07) are sprayed with a conductive (metallic) paint.

The gasket located on the mounting frame, for sealing the Filter Fan or Exhaust Filter in the cabinet is also metalised.

In addition; located at the EMC Filter Fan between the metalized mounting frame and the filter mat, is a metal grid.

Therefore, between the metal parts of the Filter Fan and the metal cabinet, there is a conductive connection.

Filter Fan in "reverse flow" version

As supplied, the standard Filter Fan is in "Draw-In"- mode, which means that cool air is filtered and drawn into the cabinet. In some cases it may be required that the warm air is blown out of the cabinet.

In which case it is possible to get Filter Fans in "Exhaust Filter" mode version (7F.21 and 7F.80).

Mounting of the pressure compensation device

In sealed cabinets and enclosures the internal pressure can vary due to changes in temperature. The pressure compensation device (07F.80) will relieve this internal/external pressure differential whilst maintaining a high level of protection - preventing the ingress of dust and moisture into the cabinet or the enclosure. The pressure compensation device is approved for use in cabinets and enclosures according to DIN EN 62208.

Drill a hole Ø $37^{+1.0}$ mm in the housing wall and fix the pressure compensation device with the accompanying nut. It is important to ensure that the sealing ring is located on the outside. To ensure optimum pressure balance, it is recommended to fit 2 pressure compensation device at the upper sides of the cabinet or enclosure.